




HumidCheck Moisture Meter

Product Images

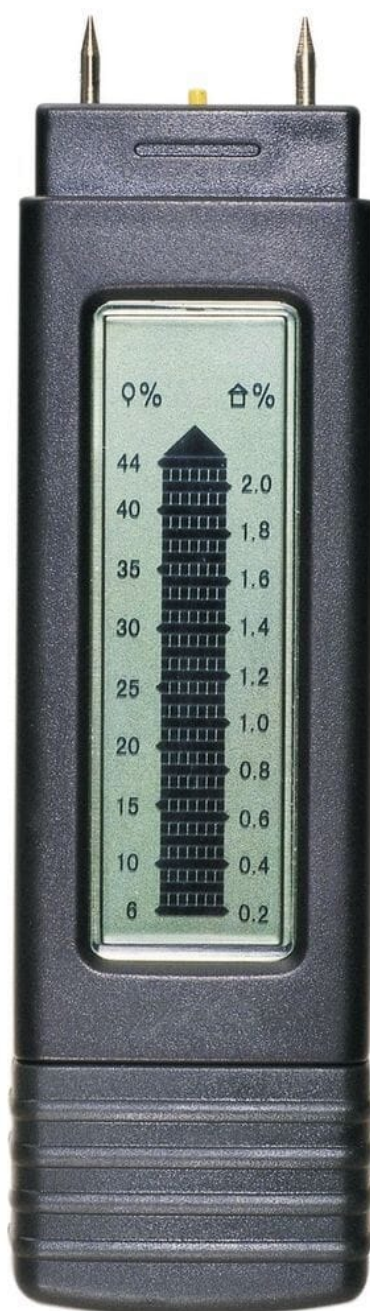

Short Description

HumidCheck Moisture Meter

Description

The TFA Humidcheck unit is a moisture meter, which is designed to measure the percentage of water within wood, and hardened materials.

To power the unit, the cap should be removed and reattached at the bottom of the unit. This automatically switches the unit on. The measuring electrodes should then be inserted in to the material, and an instant reading will be given. The electrodes should be inserted in to the material as far as possible in order to obtain the most accurate reading possible. The reading will then be displayed as a bar graph.

Once the measurement has been taken, the cap should be replaced on the top, and this will switch the unit off. If the cap is not replaced, the unit does feature an auto shut off after 15 minutes of inactivity.

The unit is contained in a robust housing, and also features a handy belt clip, for easy transportation. The Humidcheck is supplied in a black cotton pouch.

- Temperature Range: 0°C to 40°C
- Humidity Range: 0%rh to 85%rh
- Moisture within wood range: 6% to 44%
- Accuracy: Wood: +/-1%
- Moisture within construction material range: 0.2 to 2%
- Accuracy: Construction Material: +/-0.05%
- Probe: 8mm
- Dimensions: L 130 x W 40 x D 21mm
- Battery: 3 x CR2032 batteries (included)
- Warranty: 1 year
- Manufacturer: TFA

Additional Information

Brand	TFA Dostmann
Min/Max Readings	no
Min/Max Reset	no
Size : Height	13cm
Wrist Strap	no
Warranty	1 Year
Auto Switch Off	no
Clip-On	yes
Calibration	Can Be Calibrated
Cabled Probe	no
Aggregate Materials Range	0.2% to 2.0%
Hardened Materials Accuracy	+/- 0.05%
Measuring Units	%
Temperature Range	no
Power	Battery
Low Battery Indicator	no
Backlight	no
Size : Depth	3.2cm
Wood Range	6% to 44%
Size : Width	4.1cm